




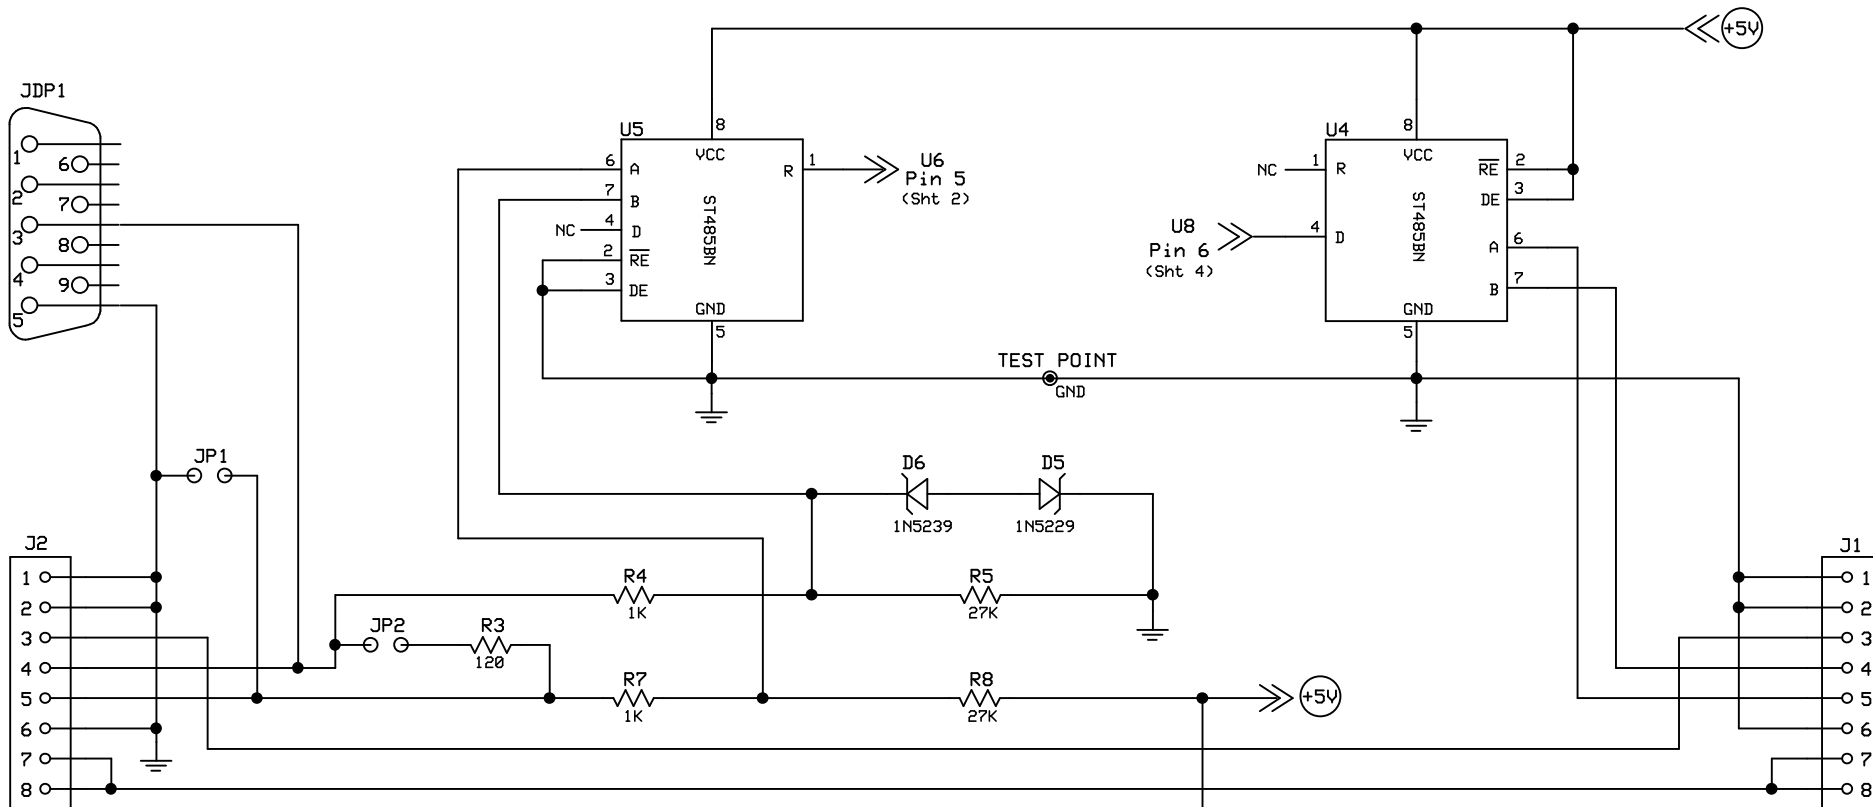


Notes:
 RS232 Operation: J2 Connector Pin 4 = 232TXD, Pin 5 = 232Gnd
 RS485 Operation: J2 Connector Pin 4 = 485B-, Pin 5 = 485A+

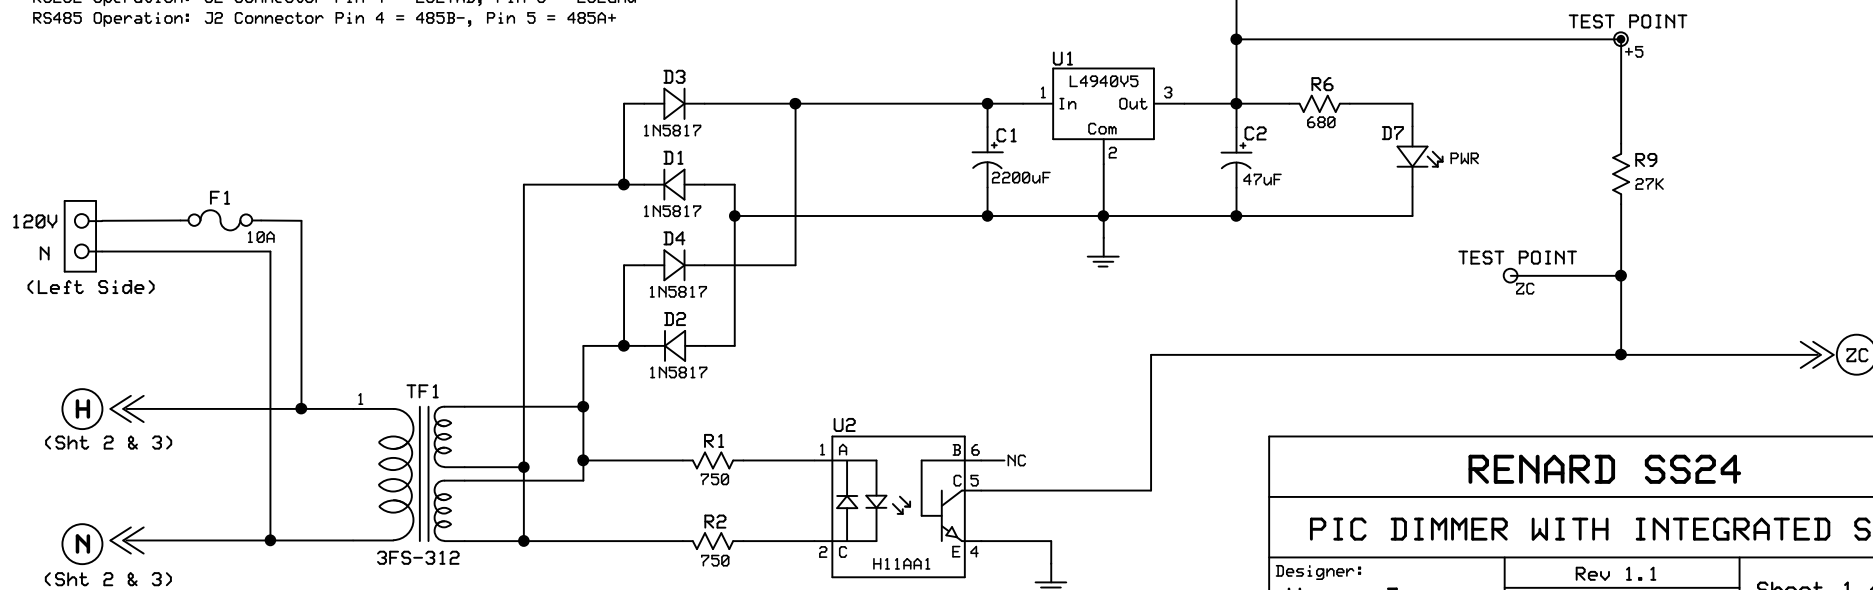

RENARD SS24		
PIC DIMMER WITH INTEGRATED SSRs		
Designer:	Rev 1.1	Sheet 1 of 4
Wayne James	7 Aug 2010	

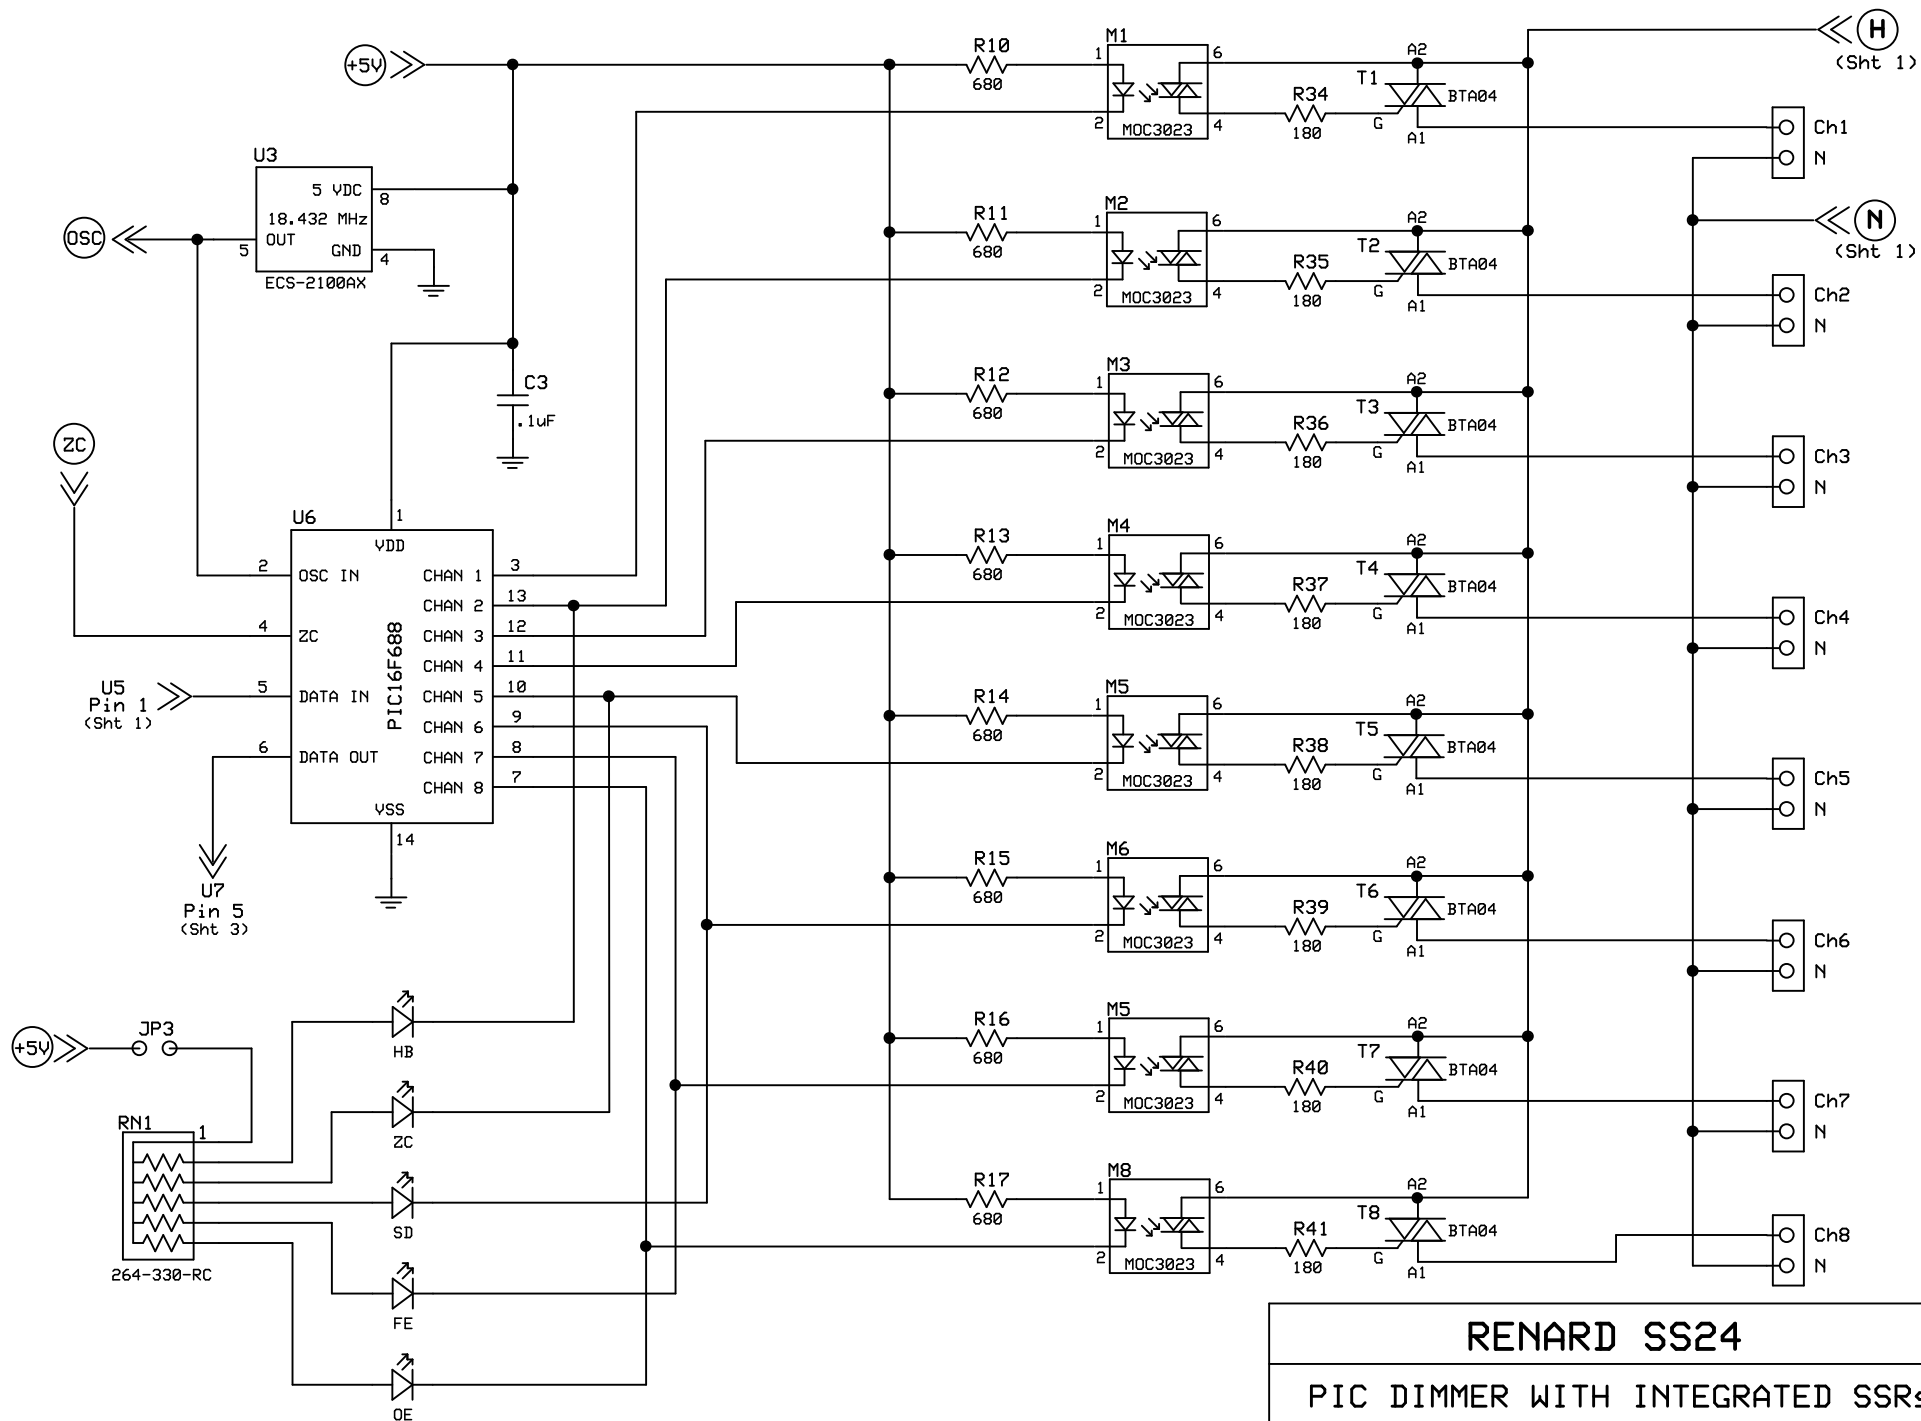

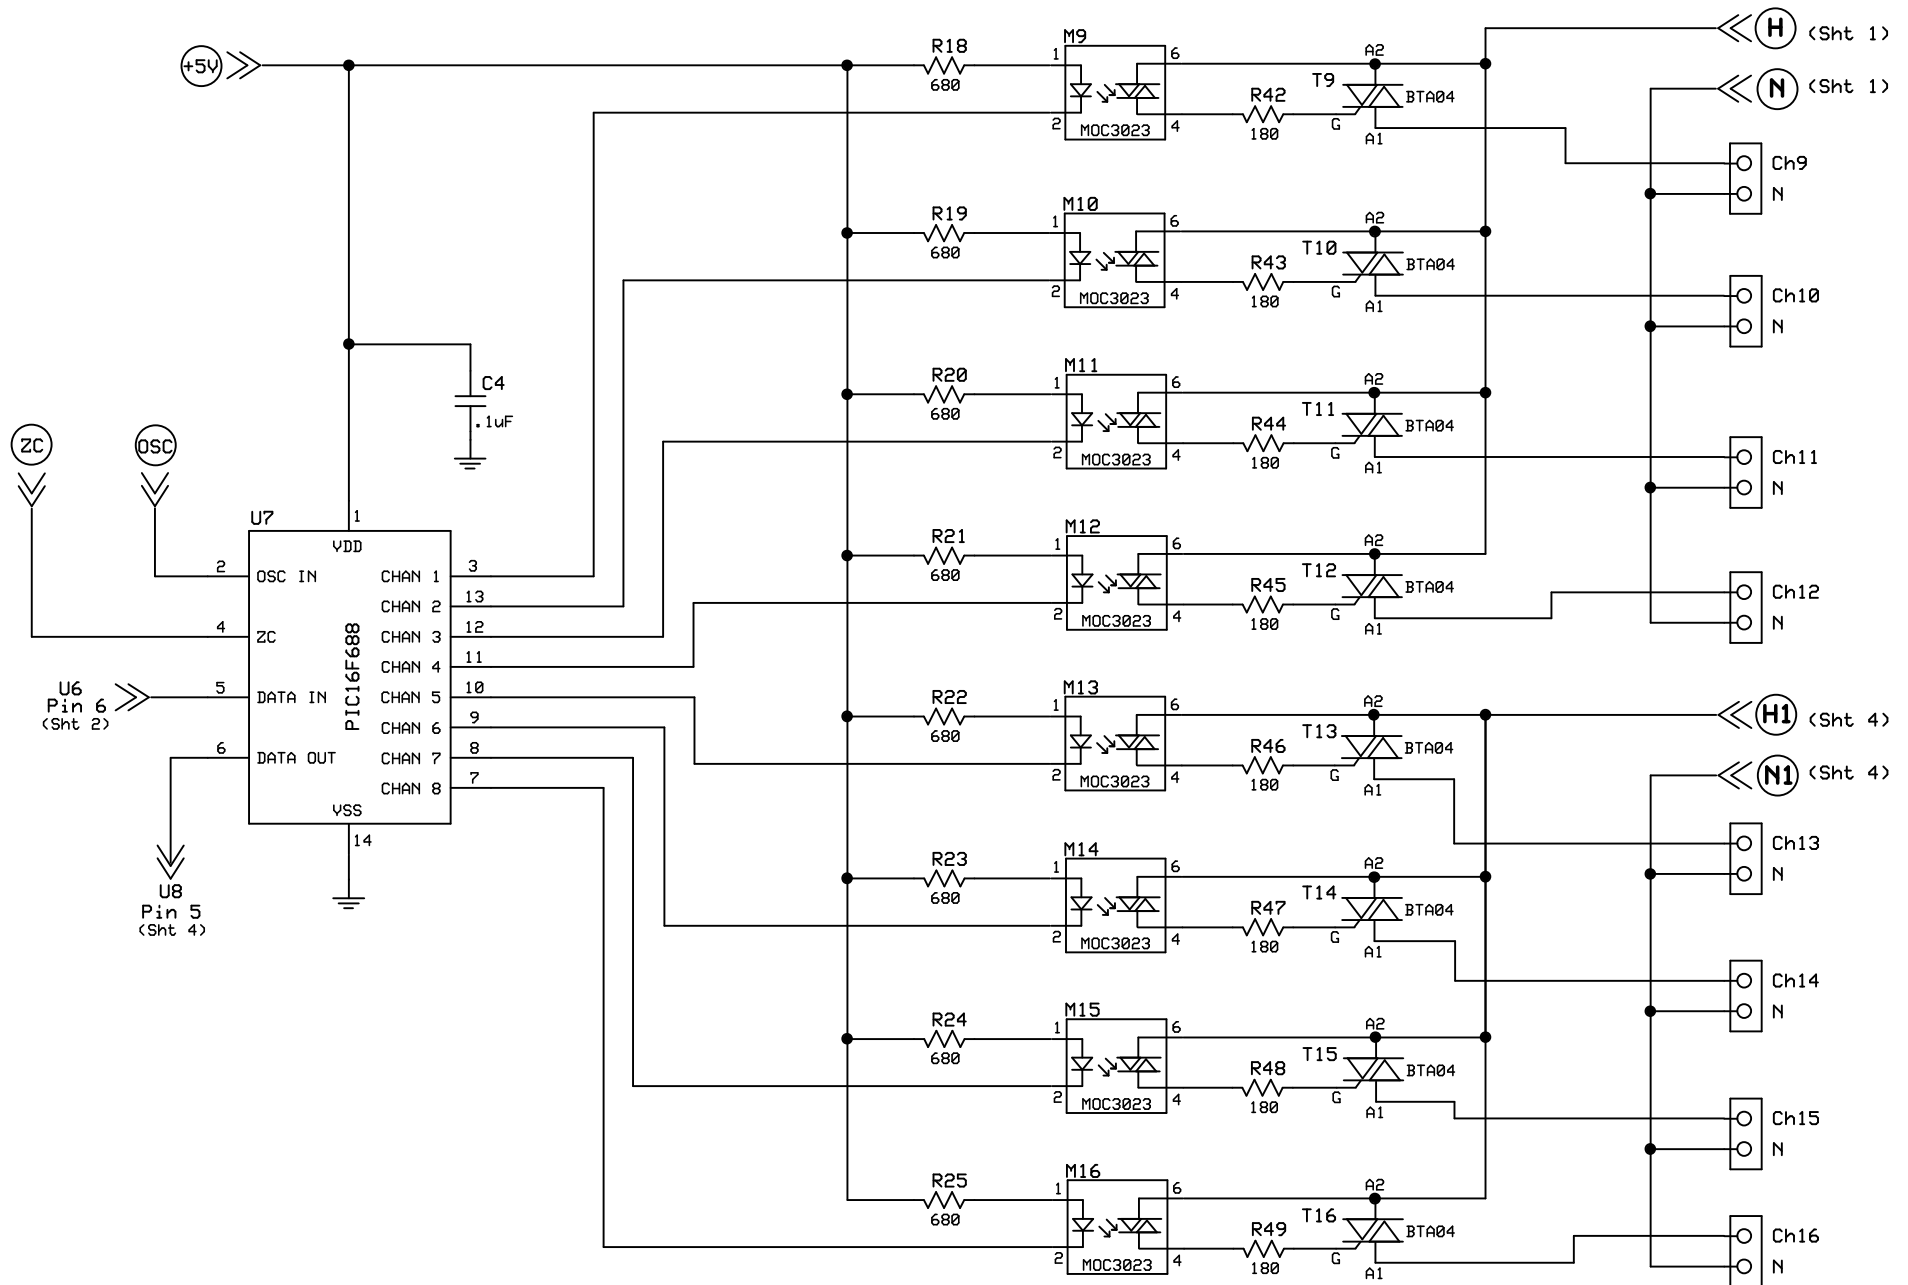

RENARD SS24

PIC DIMMER WITH INTEGRATED SSRs


Designer:

Wayne James

Rev 1.1

7 Aug 2010

Sheet 3 of 4

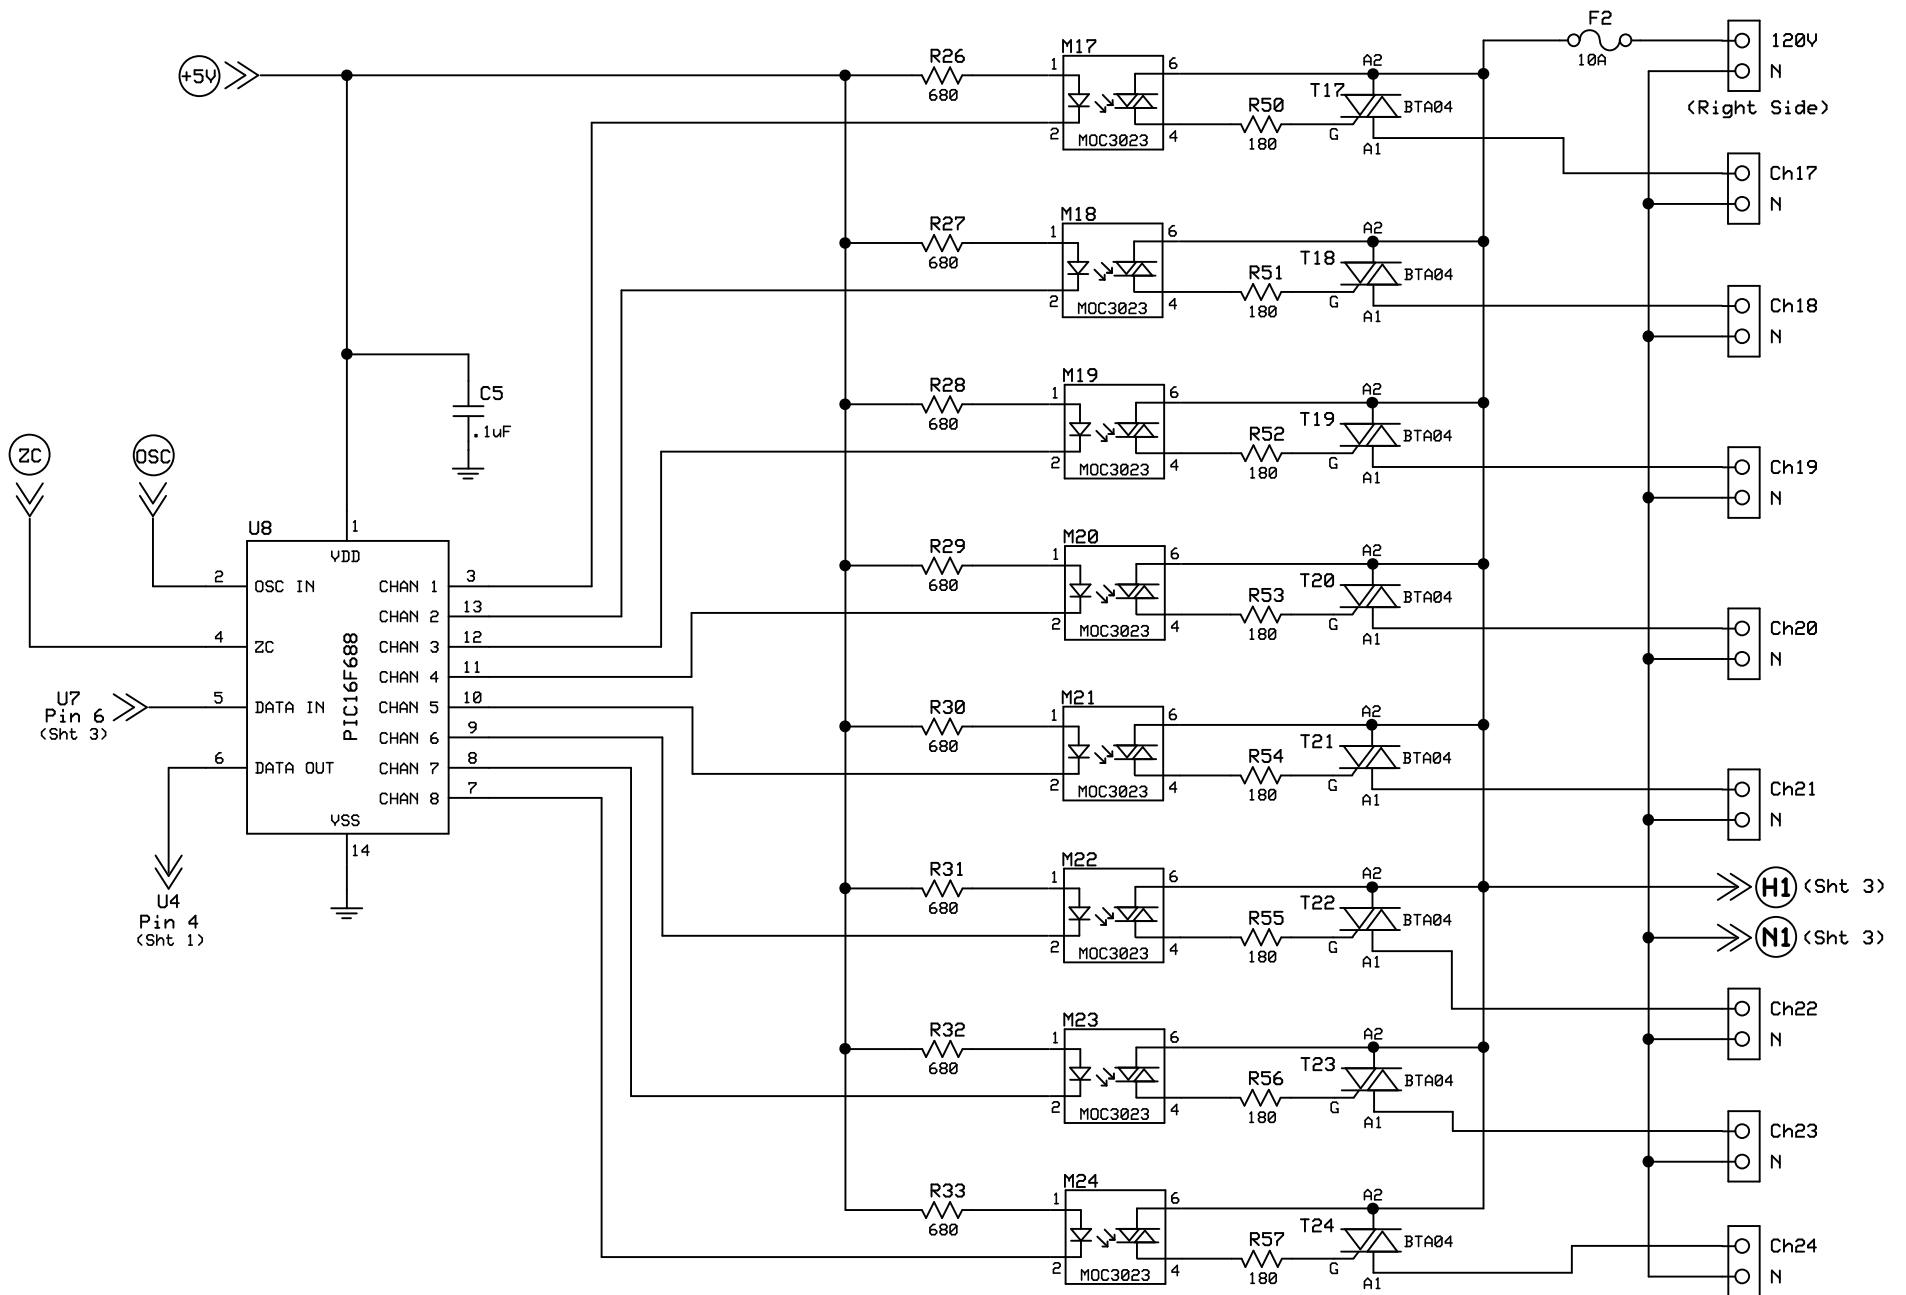

RENARD SS24

PIC DIMMER WITH INTEGRATED SSRs

Designer:

Wayne James

Rev 1.1

7 Aug 2010

Sheet 4 of 4